


Custom stainless steel handles




- A -

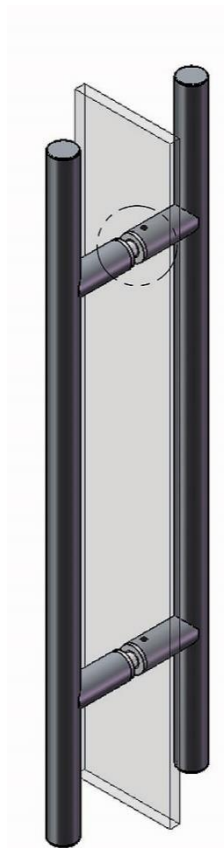

- B -



- C -

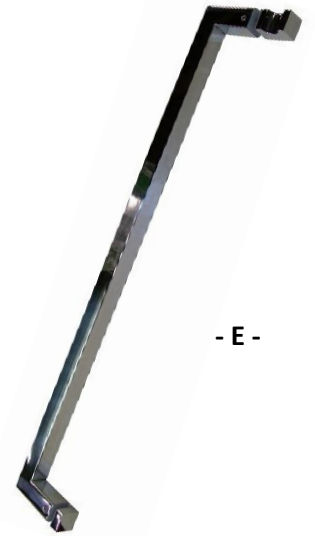

- E -



- D -

Custom handles	Ø 25		Ø 30		Ø 40	
	A	B	A	B	A	B
<= 350 mm	707 00Y	707 05D	707 10K	707 15Q	707 30G	707 35M
<= 950 mm	707 01Z	707 06F	707 11L	707 16R	707 31H	707 36N
<= 1950 mm	707 02A	707 07G	707 12M	707 17S	707 32J	707 37P
<= 2950 mm	707 03B	707 08H	707 13N	707 18T	707 33K	707 38Q
<= 6000 mm	707 04C	707 09J	707 14P	707 19U	707 34L	707 39R

Handle in stock	Length	Spacing	Ø drilling	mark	For glass from 6 to 16 mm		For 8 mm glass
					Ø 20 BSS	Ø 25 BSS	∅ 20 PSS
	300 mm	200 mm	14	B	707 67W	-	-
	500 mm	300 mm	14	B		707 87T	
	1000 mm	600 mm	14	B		708 80U	
	320 mm	300 mm	10	E	Single vertical handle		705 18A
	520 mm	500 mm	10	E	Horizontal single handle		705 19B

Drilling Ø 14mm

Accessories for simple handles for transforming a single handle 707 into a handle-knob ideal for sliding doors (see 601). The button or the bowl are positioned on the fixed glass side. The stick handle can thus be mounted vertically or horizontally on the other side of the door.

Button Ø30 x40 in brushed stainless steel with threaded rod M8x50 and clear plastic wedge.	C	707 65U
Bowl Ø40xØ30x6.5 with threaded rod M8x30 and clear plastic wedge.	D	707 66V

Handle options

		Simple	double
Mirror polished stainless steel		707 57L	707 56K
Additional spacers	Ø 25	70750C	70751D
	Ø 30	707 52F	707 53G
	Ø 35	707 54H	707 55J
If handle > 2.40			
Retractable latch		708 74N	spacing > 800 mm

Door options

Thick door	708 00H	If glass thickness > 16 mm
For wood or aluminum door		
High door	708 01J	if 6000 > glass > 3000 mm
Retractable latch	708 04M	

Glass options

Tempered laminated glass	708 08R	Valide for all Ø handles
Laminated glass unhardened	708 07Q	

Attention consult ADLER sas if the number PVB layer exceeds half of the thickness of a glass in mm.

$$\text{Ratio } \frac{\text{TH. PVB}}{\text{th. Thinner glass}} \geq 0.2 \text{ mm consult Adler}$$



Handles with integrated lock


ADLOCK handles with integrated lock offer highly aesthetic, ergonomic and tailor-made solutions for locking glass doors from 8 to 16mm (office buildings, healthcare facilities, shops, school premises, collective dwellings, museums, verandas, interior fittings, Etc.). These handles can be simply adapted, on request, for doors of any thickness (eg 40mm aluminum or wood).

Sprocket / rack mechanism designed and patented by ADLER suitable for handles sticks from 25mm in diameter. Smooth operation and self-locking at the end of the closing stroke. In standard outer safety cylinder and inner knob. Any other configuration on request.


These handles are made to measure and in short time, as standard in brushed or polished stainless steel. Also available on request for heights up to 6m or other materials, finishes or shapes. Supplied with TECYC-ADLER safety cylinders (3 keys as standard) or KESO 2000 S Ω (patented key). Varied keys by default, keys on opening or flow charts on request. Supplied with 1 Ø25 x32 striker for 1-point locking handles and 2 locking strips for 2 closing points.




- E -

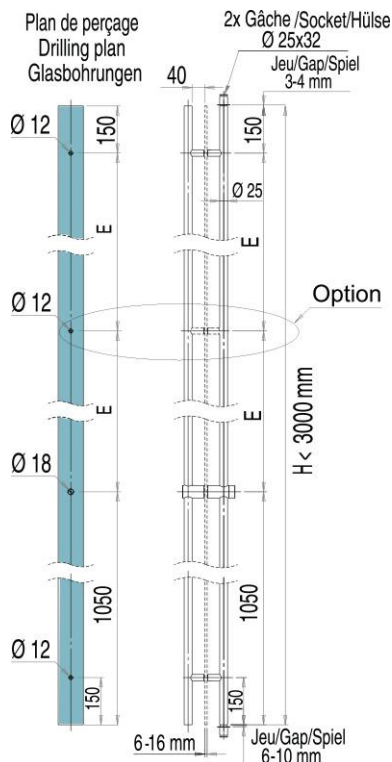

- F -

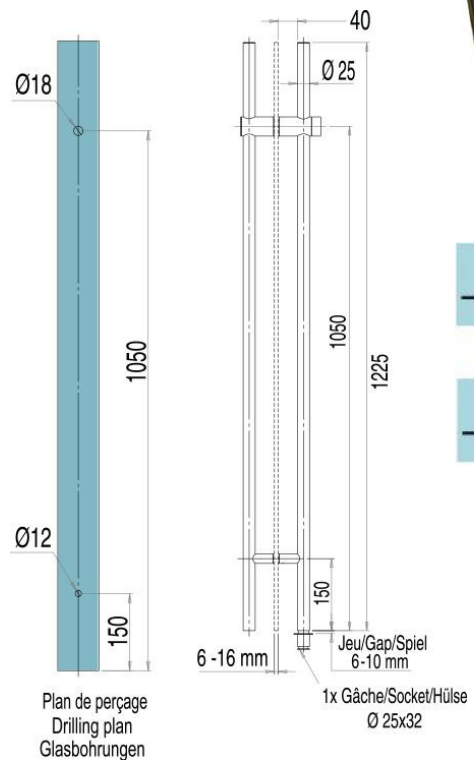

- G -



C=150mm

Handles integrated double lock

Cylinder/button	mark	BSS Ø 25	BSS Ø 35	BSS Ø 45
Any height: custom	E	707 70Z	707 72B	
½ height	F	707 75F		
Striker for glass transom	G	707 62R	707 63S	707 64T


Cylindre standard TECYC-ADLER

Cylinder with 3 keys	706 10A	Model interchangeable with KESO 200S Ω
Additional key provided with handle	706 11B	(on request)
Key after sale service	706 12C	Provided the security card or copy
Cylinder ASS without key	706 13D	

Cylinder options

Patented KESO 200S Ω cylinder	707 60P	Supplied with 3 keys + security card - different combinations From 2 and more : same combination on request
Additional key	706 72T	Available from the commercial document
Service key + 3 keys	706 68P	Provided the security card or copy
Customer Service	706 75W	

Handle options

		Simple	Double
Mirror polished stainless steel		707 57L	70756K
Additional spacers	Ø 25	707 50C	707 51D
	Ø 30	707 52F	707 53G
	Ø 35	707 54H	707 55J
		If glass thickness > 2.40	
Reinforced Strong Spacers		708 74N	
Ground striker		707 61Q	

Door options

Thick door	708 00H	If glass thickness > 16 mm
	Wooden or aluminium door	
High door	708 01J	If 6000 > glass > 3000 mm
Retractable latch	708 04M	

Glass option

Tempered laminated glass	708 08R	Valid for all Ø of handles thickness limited to the ratio below
Laminated glass unhardened	708 07Q	


Attention consult ADLER sas if the number PVB layer exceeds half of the thickness of a glass in mm.

$$\text{Ratio } \frac{\text{TH. PVB}}{\text{th. Thinner glass}} \geq 0.2 \text{ mm consult Adler}$$



Organizational + Path Options

With TECYC cylinder	706 10A	On demand
---------------------	----------------	-----------




Variant 2
key / key

- A -

Variant 3
button / button

- B -




706 16H

- C -





706 15G


- D -

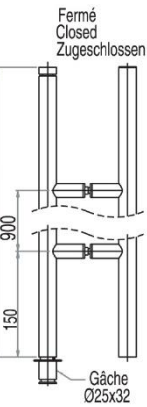

- E -

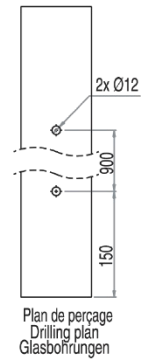

Plan de perçage
Drilling plan
Glasbofrungen

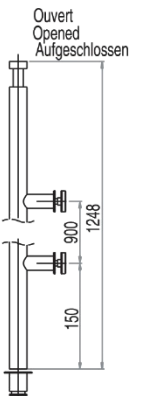

- F -

	mark	Simple Ø 25	Double Ø 25	BSS
Cylinder / cylinder				
Any height	A		708 68G	2 custom closing points - custom
½ height	A		708 69H	1 closing point
Button/button				
Any height	B		707 69Y	2 custom closing points - custom
½ height	B		707 68X	1 closing point
Cylinder on the outside				
Any height	C	706 16H		2 custom closing points - custom
½ height	D	706 15G		1 closing point
Inner side cylinder				
Any height	E	707 85R		2 custom closing points -custom
½ height		707 86S		1 closing point
Push Button Closure				
Height 500 mm		707 80L	707 82N	1 closing point on the ground
Height 1225 mm	F	707 81M	707 83P	1 closing point on the ground